

TEL: (860) 585-1254 FAX: (860) 584-1973

H25-FE-R3HC-11 Specification Sheet


SHEET # 940-2T882

DESCRIPTION

The H25-FE-R3HC-11 is an AMCI size 25, flange mount, single turn transducer with an end connector that is a bolt-in replacement for most flange mount optical encoders. This IP67 rated transducer is made from stainless steel and will withstand operating temperatures up to 150°C (302°F). The corrosion resistant construction of the H25-FE-R3HC-11 along with its extreme temperature rating allows it to be used in environments where most sensors will not survive.

The outline drawing below details our standard unit with a 3/8" shaft that has a flat milled into the shaft.

Because the H25-FE-R3HC-11 is an absolute sensor, it cannot "lose counts" as an incremental transducer can. If the H25-FE-R3HC-11 appears to be losing counts when operating, the usual cause is a shaft slipping in a loose coupler.

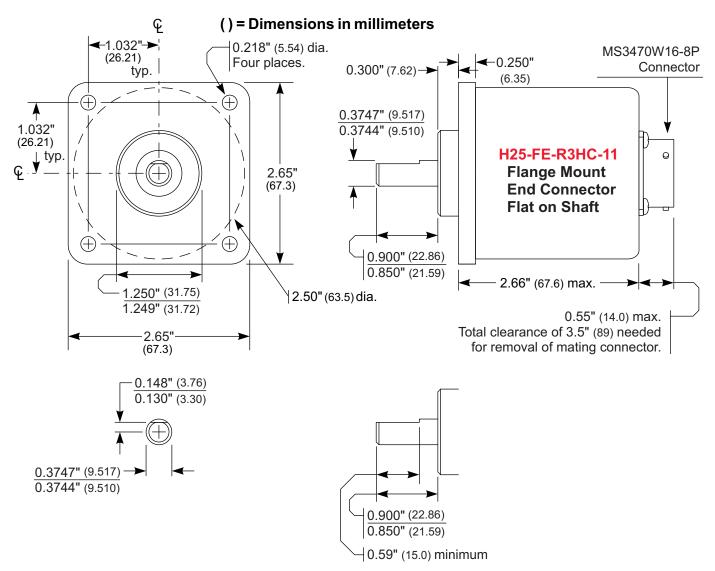

DIMENSIONAL DRAWING

LEADERS IN ADVANCED CONTROL PRODUCTS

H25-FE-R3HC-11 Specification Sheet


SPECIFICATIONS

ELECTRICAL Input Voltage: 7.0 VRMS Input Freq: 5000 Hz Primary: Rotor Input Current: 20.0 mARMS Max. Output Voltage: 6.65 VRMS Nom. Trans. Ratio (TR): 0.95 ± 5% Accuracy: ± 12 min. (max error)
 MECHANICAL Shaft Loading: Radial: 40 lbs. max[†]. Axial: 20 lbs. max[†]. Starting Torque: 2.0 oz.in. @ 25°C Moment of Inertia: 6.00X10⁴ oz-in-sec² max. Weight: 3.5 lbs. † Bearing life rated at 2X10⁹ revolutions min. at maximum shaft load.
ENVIRONMENTAL Shock: 50 g's for 11 mSec Vibration: 15 g's to 2000 Hz Operating Temp: -40 to 150°C (-40 to 302°F) Enclosure: IP 67 304 Stainless Steel Body 303 Stainless Steel Shaft Viton Shaft Seal

CONNECTOR PINOUT

The figure below shows the connector pinout to industry standard designations and wire colors.

Military Equivalent #: MS3470W16-8P



FOR MORE INFORMATION

If you need more information on the H25-FE-R3HC use these three resources:

*

If you have internet access, check our website at http://www.amci.com. We've worked hard to make our site the respository of information you need to specify and use AMCI products. New product news, product specifications, compatibality tables, application notes, and PDF manuals are all available 24 hours a day.

You can also call AMCI for sales or technical support at (860) 585-1254 from 8AM to 5PM EST, Monday through Friday. An applications engineer will be available to assist you.

Finally, you can e-mail us at sales@amci.com or techsupport@amci.com.